


Strictly confidential! The information contained in this document is property of Heinrich Nymphius GmbH and may not be reproduced or disclosed to third parties without Heinrich Nymphius GmbH's prior written consent. Heinrich Nymphius GmbH reserves all rights to its information and will legally prosecute any unauthorised use or disclosure!

Streng vertraulich! Die in diesem Dokument enthaltenen Informationen sind geistiges Eigentum der Heinrich Nymphius GmbH und dürfen ohne vorherige schriftliche Zustimmung weder vervielfältigt noch Dritten zugänglich gemacht werden. Die Heinrich Nymphius GmbH behält sich alle Rechte vor und wird jede Zuwiderhandlung zivil- und strafrechtlich verfolgen!

EPP: JE PP / JS PP

- barrel diameter: 28 smooth, 28 threaded
- customized barrel length
- short stroke / long stroke
- fill plug Ø 4, 6, 8 (short stroke)
- fill plug Ø 10, 12 (only long stroke)

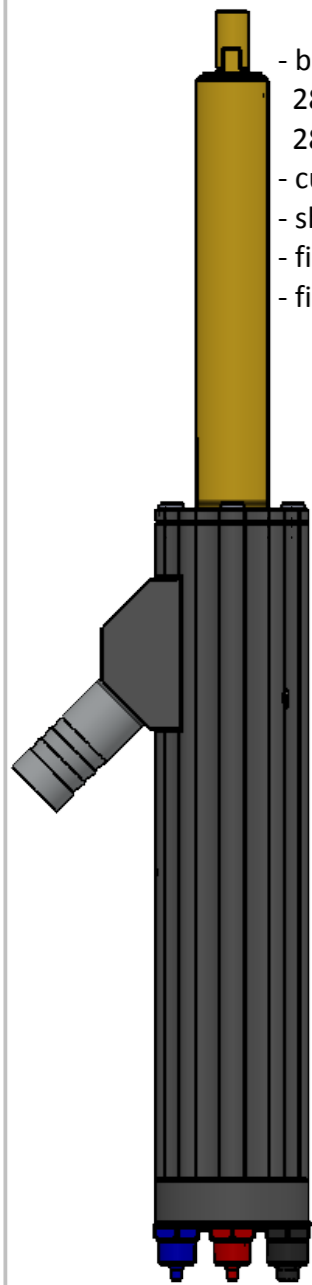


integrated ejection feature (optional)

rod guide with high-quality seals

connection for filling air at rear deck together with connections for open / close

1032 / 2034

- barrel diameter: 28 smooth, 28 threaded
- customized barrel length
- long stroke
- fill plug Ø 8, 10, 12

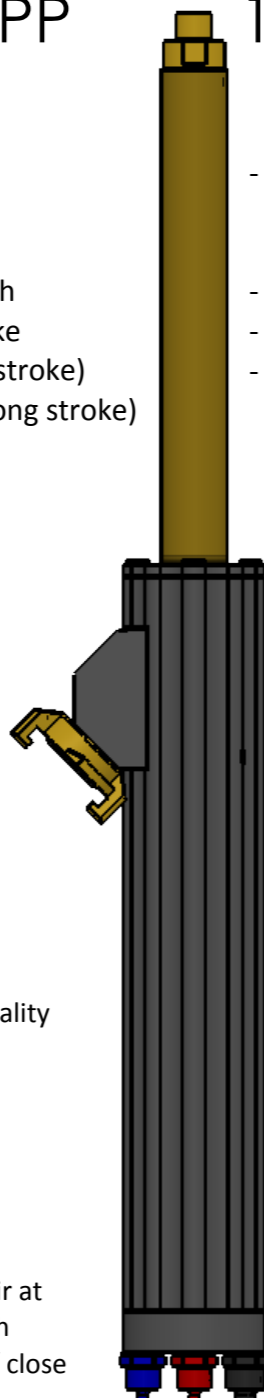


integrated ejection feature (optional)

rod guide with high-quality seals and scrapers

connection for filling air at rear deck together with connections for open / close

3800 / 3800T

- barrel diameter: 40, 42, 50 smooth, 42 threaded
- customized barrel length
- short stroke / long stroke
- fill plug Ø 12, 16, 18, Ø 28 (only long stroke)

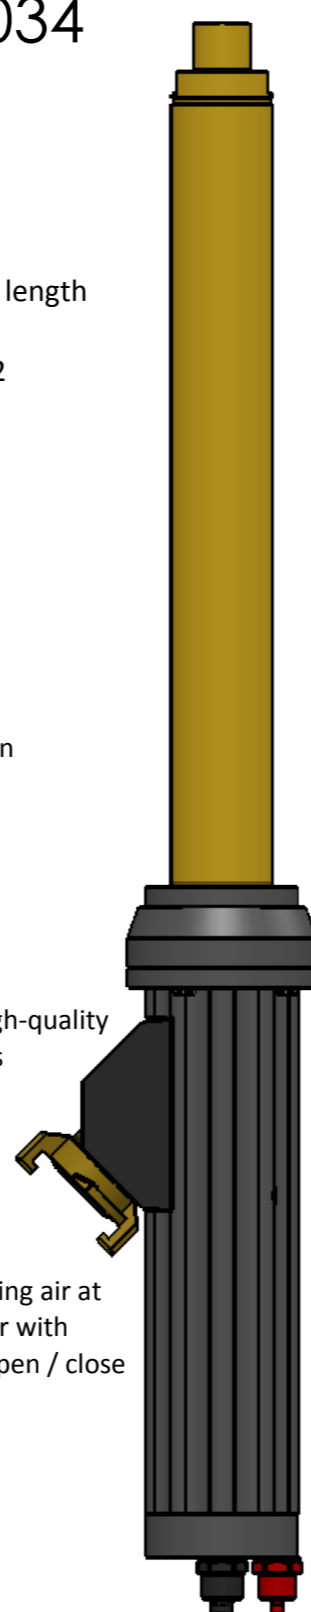


integrated ejection feature (optional)

3800: front part and cylinder separable (4 screws)

rod guide with high-quality seals and scrapers


connection for filling air at rear deck together with connections for open / close

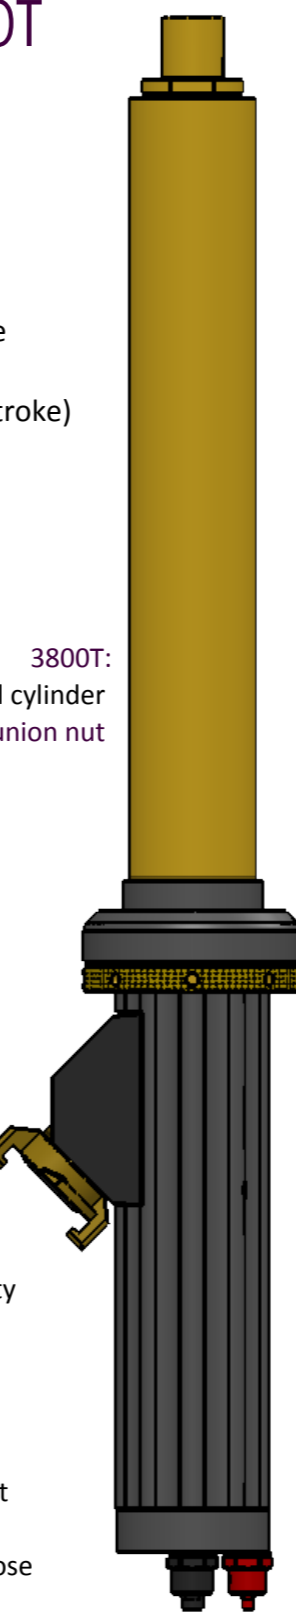

3800T: front part and cylinder easily separable by union nut

2060

- barrel diameter: 40, 42, smooth, 42 threaded
- customized barrel length
- short stroke / long stroke
- fill plug Ø 12, 16, 18

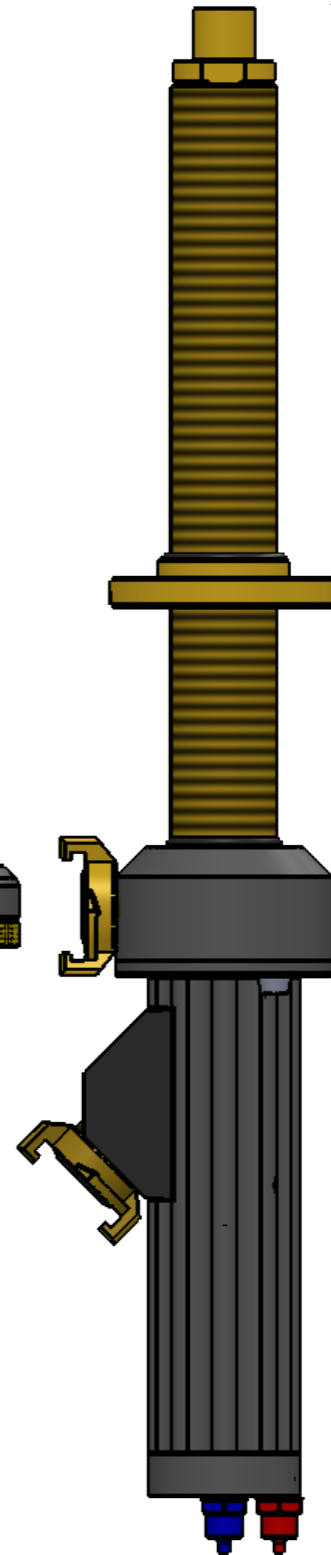

integrated ejection feature (optional)

large connection for filling air at front part for maximum air supply

front part and cylinder easily separable by bayonet-quick coupling

continuously adjustable connections for material and filling air

rod guide with high quality seals, scrapers and wipers for maximum resistance under extreme circumstances

connections for open / close at rear deck

All of our injectors feature:

Customized design of fill plug, fill barrel head, fill barrel, and connections for material and air supply

High cost savings through superior efficiency (proven by performance- and energy consumption measurement conducted on certified fill gun testing facility of Teubert Maschinenbau GmbH, being the single reliable data source in the entire industry)

High life-expectancy and process reliability through superior manufacturing quality using only the most high-grade components and seals

High ease of maintenance through extended service intervals

Powerful blow-back function for optimal filling and avoiding of material jam

Widest selection of different models, options, and customized solutions in the entire industry

Kantenbruch / Kantenrundung:		Anzahl / Einheit		Program Nr.:		Maßstab: F = 0,33	
Oberflächenrautiefe:		(1x)		Designed on SolidWorks		ISO 128	
Allgemeintoleranz:		OBERFLÄCHE:		BENENNUNG:		EPP - injectors	
GEZEICHNET	NAME	DATUM	SIGNATUR	ZEICHNUNGSNR.:		Stückzahl:	
GEPRÜFT	M. Nymphius	18.01.2018	M.N.	JE8PP / JS8PP / 1032 / 2034 / 2060 / 3800			
Index	Änderung	Datum / Name		Kopiert: (Datum / Name)		Zeichnung nur gültig für Auftrag:	
				Ersatz für:		BLATT 1 VON 1	
HEINRICH NYMPHIUS Neumarkter Str. 50 / D - 81673 München				gefertigt aus:		A3	