


Strictly confidential! The information contained in this document is property of Heinrich Nymphius GmbH and may not be reproduced or disclosed to third parties without Heinrich Nymphius GmbH's prior written consent. Heinrich Nymphius GmbH reserves all rights to its information and will legally prosecute any unauthorised use or disclosure!


Streng vertraulich! Die in diesem Dokument enthaltenen Informationen sind geistiges Eigentum der Heinrich Nymphius GmbH und dürfen ohne vorherige schriftliche Zustimmung weder vervielfältigt noch Dritten zugänglich gemacht werden. Die Heinrich Nymphius GmbH behält sich alle Rechte vor und wird jede Zuwiderhandlung zivil- und strafrechtlich verfolgen!

EPS: JE / JS

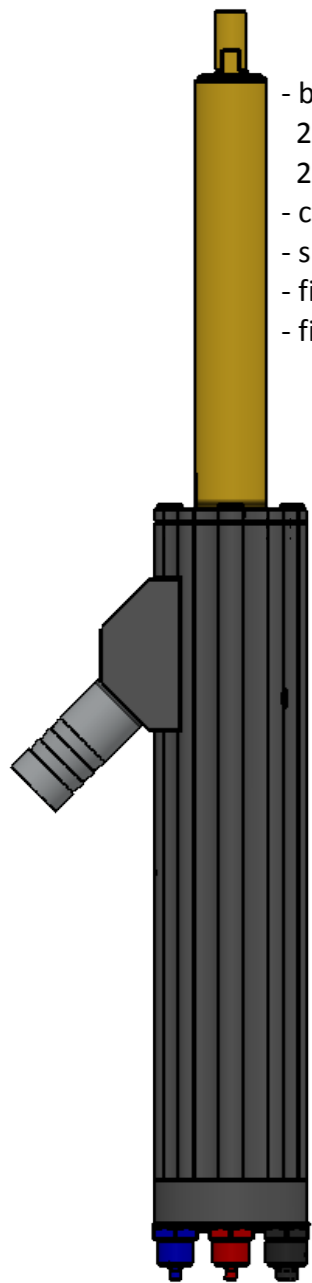


- barrel diameter: 28 smooth; 28 threaded;
- customized barrel length
- short stroke / long stroke
- fill plug \varnothing 4, 6, 8 (short stroke)
- fill plug \varnothing 10, 12 (only long stroke)

J10 / J12 / J16 / J18 J10 T / J12 T / J16 T / J18 T

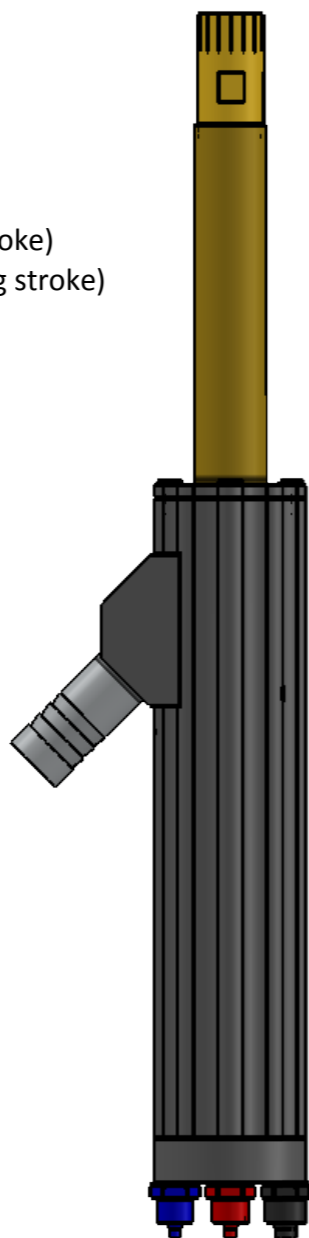


- barrel diameter: 28 smooth; 28 threaded;
- customized barrel length
- long stroke
- fill plug - \varnothing 10, 12, 16, 18

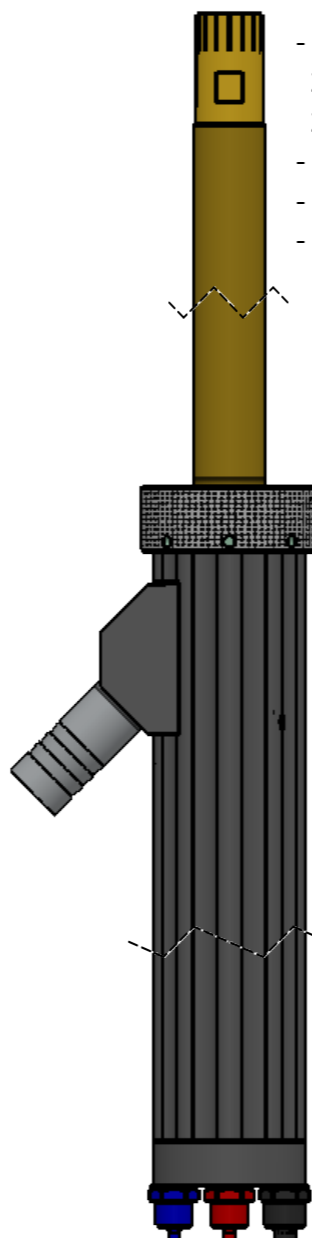


J ... T:
front part and cylinder easily separable by union nut

JEF

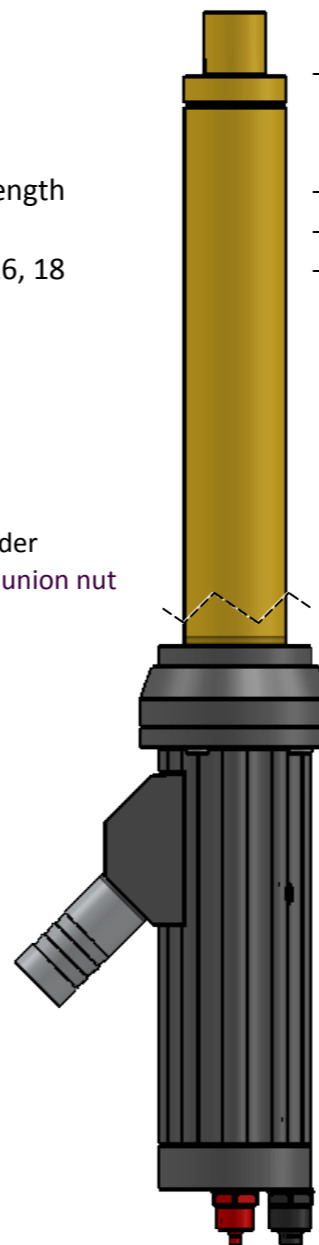

- barrel diameter: 40, 42, 50 smooth; 42 threaded;
- customized barrel length
- short stroke
- fill plug - \varnothing 12, 16, \varnothing 18 (only fill barrel- \varnothing 50)

JP

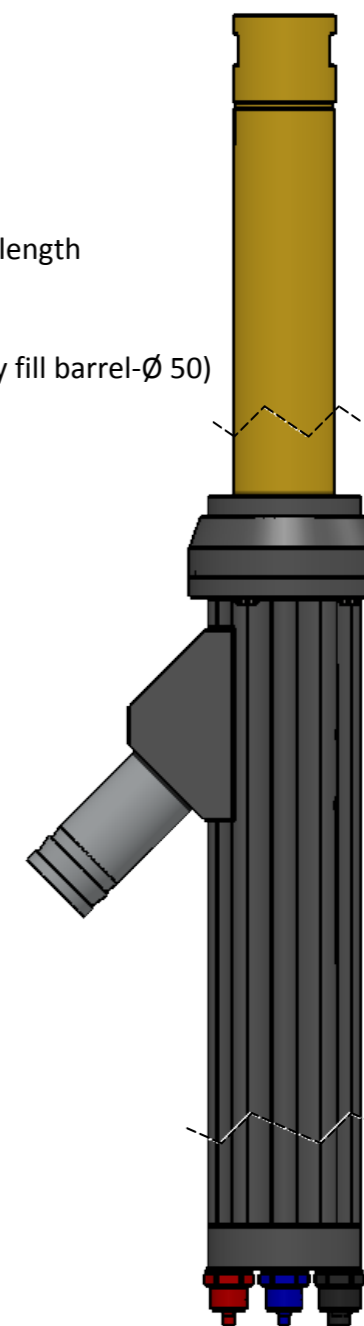

- barrel diameter: 40, 42, 50 smooth; 42 threaded;
- customized barrel length
- long stroke
- fill plug - \varnothing 28,

All injector types optionally with integrated ejection feature

Customized design of fill plug, fill barrel head, fill barrel, and connections for material and air supply

All of our injectors feature:

High cost savings through superior efficiency (proven by performance- and energy consumption measurement conducted on certified fill gun testing facility of Teubert Maschinenbau GmbH, being the single reliable data source in the entire industry)

High life-expectancy and process reliability through superior manufacturing quality using only the most high-grade components and seals

High ease of maintenance through extended service intervals

Powerful blow-back function for optimal filling and avoiding of material jam

Widest selection of different models, options, and customized solutions in the entire industry

Kantenbruch / Kantenrundung:		Anzahl / Einheit		Program Nr.:		Maßstab: F = 0,33	
Oberflächenrauhiefe:		(1x)		Designed on SolidWorks		ISO 128	
Allgemeintoleranz:		OBERFLÄCHE:		BENENNUNG:		EPS - injectors	
GEZEICHNET	NAME	DATUM	SIGNATUR	ZEICHNUNGSNR.:		Stückzahl:	
	T. Kurth	18.01.2018	T.K.	JE8 / JS8 / J10 / J12 / J16 / J18 / JEF / JP			
GEPRÜFT	M. Nymphius	18.01.2018	M.N.	Kopiert: (Datum / Name)		Zeichnung nur gültig für Auftrag:	
Index	Änderung	Datum / Name		Ersatz für:		BLATT 1 VON 1	
				gefertigt aus:		A3	